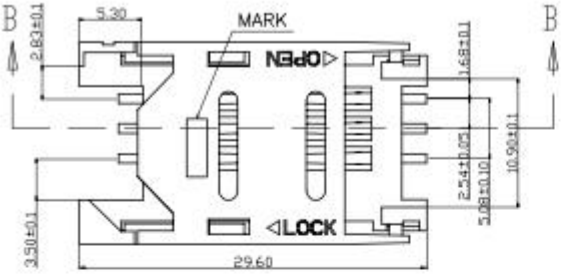



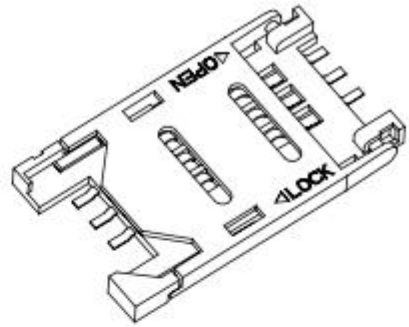

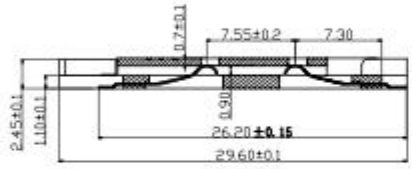

SENTION B-B

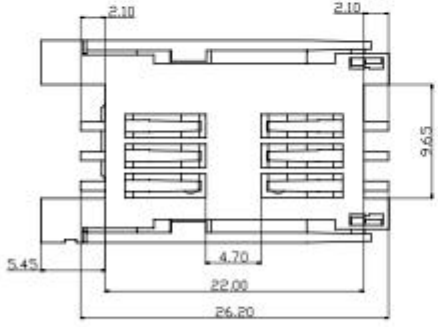

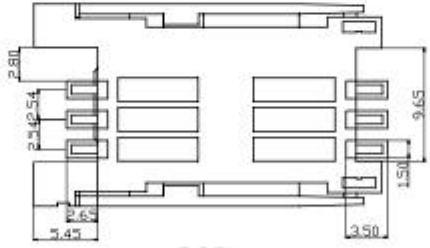

PCB

A.Material:
1.Insulator:High temperature thermoplastic UL94V-0,(BLACK LCP)
2.Pho.Bronze:Plating,
50U" MIN NICKEL UNDERPLATED;
3-8U" ON THE CONTACT AREA;
100U" TIN PLATING ON SOLDER TAIL

B.Electrical specifications:
Voltage rating: 12 V AC
Current rating: 0.5A
Dielectric strength: 250V AC for 1 minute min
Insulation resistance: 500 M ohm
Contact resistance: 50 mill.ohm max
Operation temperature: -40℃ to +105℃
Product withstanding rff low soldering 260℃ for 10s

C.Mechanical specieications:
3.1 Durability: 5000 cycles

Angel	±2°						JIAYU ELECTRONLC CO.,LTD.	
0~10	±0.10						2008.9.12	SIM 6PIN SMT
10~20	±0.15							
20~30	±0.20							JY5021250

PDF created with pdfFactory Pro trial version www.pdffactory.com